

## HP1500 INOX

Surface Multi-stage self-priming centrifugal pump made according to highest quality standards in relation to both materials and design. Pump intended for pumping of clean cold water from own intakes and for pressure increase. The body and shaft of the pump in the part in contact with water are made from stainless steel (INOX design). The advantage of HP pumps is the option of pumping water with temperature of 70 °C. The pump motor is equipped with thermal protection built-in in the winding.



MAX. TEMP.  
70°C



DURABLE  
STRUCTURE



LARGE  
HEAD



INOX  
BODY




QUIET  
WORK



HIGH  
PERFORMANCE



photo HP1500 INOX

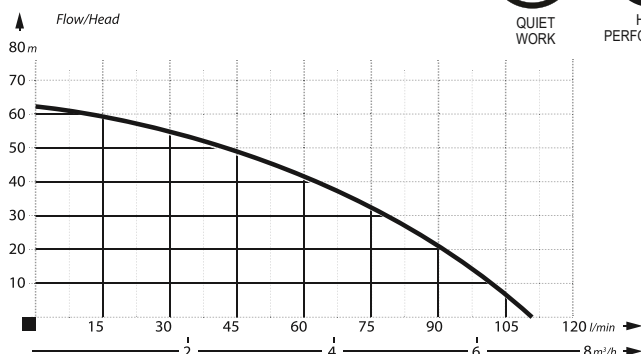

### APPLICATION:

Supply of water to houses, holiday houses, allotments and gardens as well as watering. When combined with membrane tanks, they can be used for single- and multi-family residential buildings as hydrophores, in farming households and in industry.

### PARAMETERS

| Head (m)              | Flow (l/min)   | Motor power (W)         | Power supply (V) | Suction capacity (m.) |
|-----------------------|----------------|-------------------------|------------------|-----------------------|
| 62                    | 110            | 1500                    | 230              | 8                     |
| Power consumption (A) | Ports (inches) | Dimensions (cm [L/H/W]) |                  | Weight (kg)           |
| 9,6                   | 1 x 1          | 48/23/20                |                  | 15,5                  |

## MULTI1300 INOX

Multi-step self-priming centrifugal pump with in-built net filter, equipped with a system improving the suction capacity due to use of the Venturi tube. The body of the pump is made from high quality material and stainless steel. The pump equipped with a switch integrated with the casing and grip for handling. The pump motor is equipped with thermal protection. The pump is also available with accessories, hydrophore sets and hydrophore automatons.




DURABLE  
STRUCTURE



NET  
FILTER



photo MULTI1300 INOX

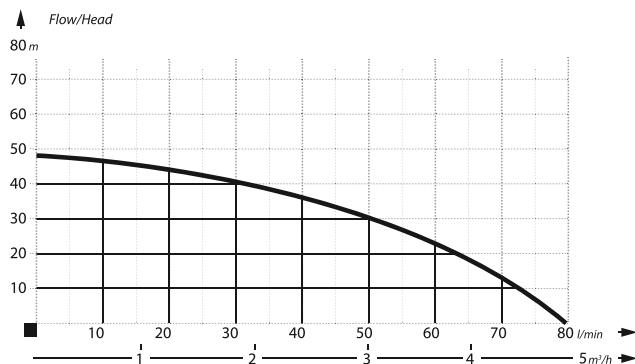

### APPLICATION:

Supply of water to houses, holiday houses, allotments and gardens and for irrigation purposes. When combined with membrane tanks, they can be used for single- and multi-family residential buildings, farming households and industry.

### PARAMETERS

| Head (m)              | Flow (l/min)   | Motor power (W)         | Power supply (V) | Suction capacity (m.) |
|-----------------------|----------------|-------------------------|------------------|-----------------------|
| 48                    | 80             | 1300                    | 230              | 8                     |
| Power consumption (A) | Ports (inches) | Dimensions (cm [L/H/W]) |                  | Weight (kg)           |
| 6                     | 1 x 1          | 44/28/23                |                  | 11                    |